



SUNPOWER TECHNOLOGY CORP.
 16F.-1, No.150, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.).
 TEL: 886-2-8226-3100 FAX: 886-2-8226-3111
 http://www.sunpower.com.tw
 E-mail: sunpower@sunpower.com.tw

SPS-060 -ITx Series

SPS-060P-ITx Series

60W, Triple Output
 P.F.C Function Optional



159 x 95 x 38 mm
 6.26 x 3.74 x 1.50 inch
 CB CE

Features:

- * All outputs are isolated , V2 & V3 polarity option (+ or -)
- * High reliability and high efficiency
- * Power ON with LED indicator
- * Built-in EMI filter, low ripple noise
- * Over voltage protection
- * Over load & short circuit protection
- * 100% full load burn-in test
- * -20°C to 70°C operating temperature
- * UL, cUL, TUV, CB, CE approved
- * 3 years warranty

Specification:

INPUT	Voltage	85V ~ 264VAC universal full range or 120V ~ 375VDC.											
	Frequency	47 ---- 63 Hz											
	Current	<1.8A @100V AC input, full load condition											
	Inrush Current	<30A@115V , <60A@230V AC input. Cold start at 25°C ambient											
	Leakage Current	<1.0mA@264V AC input											
OUTPUT	MODEL No.	SPS-060 -IT1 SPS-060P-IT1			SPS-060 -IT2 SPS-060P-IT2			SPS-060 -IT3 SPS-060P-IT3			SPS-060 -IT4 SPS-060P-IT4		
	Output	V1	V2	V3	V1	V2	V3	V1	V2	V3	V1	V2	V3
	Voltage	5V	12V	-5V	5V	12V	-12V	5V	15V	-15V	5V	12V	24V
	Min Load	0.5A	0A	0A	0.5A	0A	0A	0.5A	0A	0A	0.5A	0A	0A
	Max Load	8A	3.5A	1A	7A	3.5A	1A	7A	3A	1A	6A	1.5A	1.2A
	Output Tolerance ②	± 3%	± 5%	± 5%	± 3%	± 5%	± 5%	± 3%	± 5%	± 5%	± 3%	± 5%	± 5%
	Ripple Noise MAX. ③	70mV	120mV	100mV	70mV	120mV	150mV	70mV	150mV	200mV	70mV	120mV	200mV
	Efficiency (TYP.)	77%			78%			79%			80%		
	Output MAX.	60W			60W			60W			60W		
	PROTECTION	Over Voltage	5.8~7.0V ; Shutdown and latch off, recover after re-start up.										
Over Load & Short Circuit		When power supply over 105%~ 150% max load or short circuit acted, power supply will go into hiccup mode and recover automatically after the fault is removed.											
ELEC. CHAR.	Rise time	<20mS											
	Hold up time	>60mS@230V, full load condition											
	Setup time	<1 Sec@100 ~ 240V AC											
ENVIRONMENT	Temperature ④	Operating: -20 ~ +70°C ; De-rating: 45 ~ 70°C: 2.5%/°C ; Storage: -40 ~ +85°C											
	Humidity	Operating: 20% ~ 90% RH (non condensing) ; Storage: 10% ~ 95% RH (non condensing)											
	Altitude	6562 ft (≈ 2000 m) operating											
SAFETY	Withstand voltage	I/P-O/P:3KVAC, I/P-PE:1.5KVAC, O/P-PE:0.5KVAC, 1minute											
	Isolation resistance	I/P-O/P, I/P-PE, O/P-PE > 100MΩ/500VDC at 25°C / 70% RH											
	Safety standard	UL 60950-1 1 st , CSA C22.2 No. 60950-1- 03 1 st , TUV EN 60950-1:2006+A11+A1+A12, IEC 60950-1:2005+A1, approved											
EMC	EMI	EN 55022 CLASS B · FCC CFR 47 PART 15 CLASS B · CNS 13438 CLASS B. Compliance to EN61000-3-2 CLASS A, EN61000-3-3, SPS-060P-ITx models are built-in PFC choke to lower 25% THD (Total Harmonic Distortion) performance.											
	EMS	EN 55024 : EN 61000-4-2,3,4,5,6,8,11											
	Cooling	Natural cooling.											
OTHERS	M.T.B.F.	258K hours at 25°C											
	Terminal pitch	9P / 7.62mm with plastic cover, 90 deg terminal optional (with MOQ)											
	Packing	N.W.:0.6Kg / 1pc; 30pcs / 1.2 CUFT / 1 CTN											
NOTE	①	All measurements which not mentioned are based on 230VAC input, output Max at ambient 25°C / 70%RH											
	②	Output tolerance included set up voltage, line regulation and load regulation. The regulation is measured between 20%-80% max load of each output, Total output t must under output Max .											
	③	Ripple & noise are measured at 100~254VAC input with 10~50°C condition and 20MHz of bandwidth by using a 10" ~ 15" twisted pair-wire terminated with a 0.1uF & a 47uF parallel capacitor.											
	④	The operating temperature shall follow the de-rating curve in spec The output load may be requested for decreasing as de-rating curve in spec when low input voltage is under 100VAC											
	⑤	The power supply is considered a component of end-equipment. The end-equipment must be re-confirmed whether comply with EMC directives.											




SUNPOWER TECHNOLOGY CORP.
 16F.-1, No.150, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.).
 TEL: 886-2-8226-3100 FAX: 886-2-8226-3111
 http://www.sunpower.com.tw
 E-mail: sunpower@sunpower.com.tw

SPS-060 -ITx Series


SPS-060P-ITx Series

Block Diagram : UT9

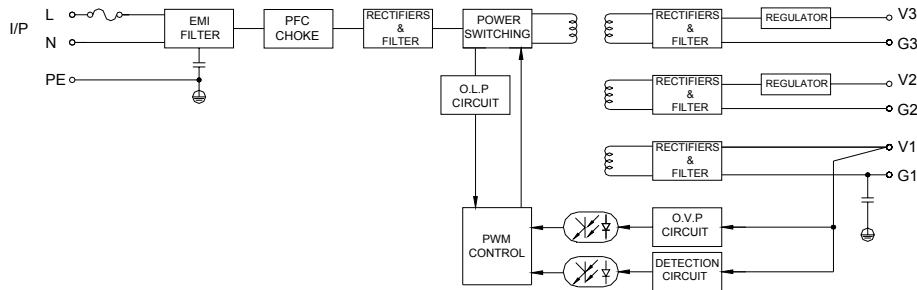


SPS-060 -ITx series without PFC choke

De-rating Curve :

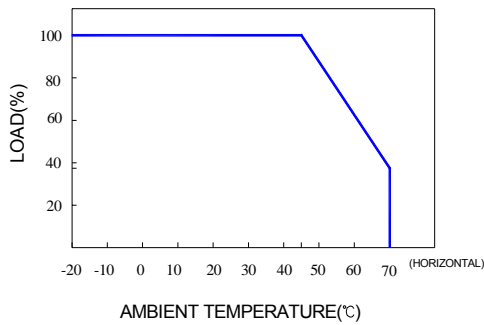


Output De-rating Vs Input Voltage :

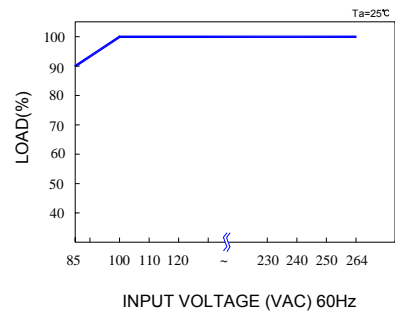

Dimension:

(Unit: mm)

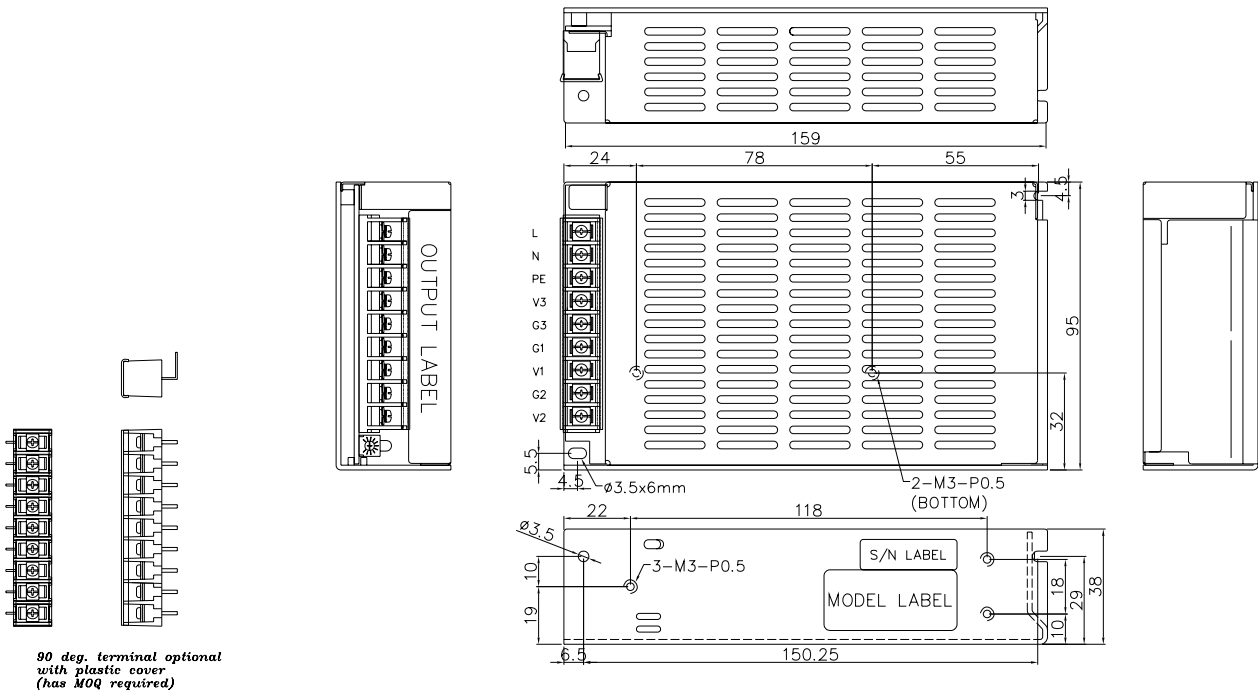

NOTES:

TERMINAL BLOCK: 9P, PITCH 7.62mm WITH OLASTIC COVER.

MODEL No.	1	2	3	4	5	6	7	8	9
SPS-060(P)-IT1/2/3	L	N	PE	V3	G3	G1	V1	G2	V2
SPS-060(P)-IT4	L	N	PE	G3	V3	G1	V1	G2	V2